

Mechanical characteristics

Cell Type	Poly-crystalline 156.75×52.25mm
No. of Cells	36(4×9)
Dimensions	545×668×25mm
Weight	4.0kgs
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65 Rated
Output cables	Not included
Quantity/cartons	5pcs


Product Standard

Product Performance	IEC61215
Product Safety	IEC61730

Specifications

Model Type	UFX060PM
Peak Power(Pmax)	60.00
Maximum Power Voltage(Vmp)	19.25
Maximum Power Current(Imp)	3.12
Open Circuit Voltage(Voc)	23.58
Short Circuit Current(Isc)	3.29
Cells Efficiency(%)	20.36
Module Efficiency(%)	16.48
Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	10
Power Tolerance	0~+3%
Pmax Temperature Coefficients(W/°C)	-0.400%
Voc Temperature Coefficients(V/°C)	-0.300%
Isc Temperature Coefficients(A/°C)	+0.060%
NOCT Nominal Operating Cell Temperature(°C)	45±2
Operating and Storage Temperature(°C)	-40~+85
Standard Test Condition(STC)	1.000W/m²; AM 1.5; 25+/-2°C

Linear Performance Warranty

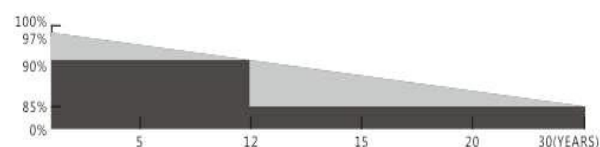

12
YEARS

Guarantee on product material and workmanship

30
YEARS


Linear Power output warranty

Certification



Drawing Picture

60W Poly solar panel (545*668*25)

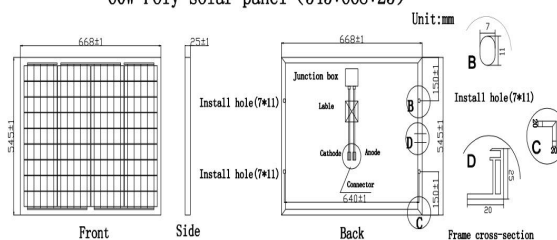

5 Busbar Cell:

5 Busbar Solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance making it perfect for rooftop installation and application



High Efficiency

High Module conversion efficiency, through innovative manufacturing technology



Low-Light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments



Serve Weather Resilience

Certified to withstand: wind load(2400Pa) and snow load (5400Pa)



Durability against extreme environmental conditions

High salt mist and ammonia resistance certified by TUV



0 to +5W Positive Tolerance

Detailed information in Electrical Specifications